


产品系列: Ajaw / 导轨射灯

项目名称:

灯具型号: MAL41230-III




产品编号:

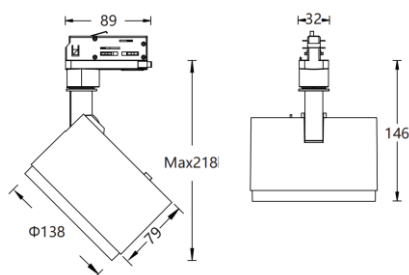

15°

22°




30°



45°

16×60°

Wallwash



产品配件



MA348-15
15°



MA348-22
22°



MA348-30
30°



MA348-45
45°



MA348-EV
16×60°



MA348-WW
Wallwash



MA348-HC
蜂窝网



MA348-ST
防眩筒



MA348-BD
四叶片



MA348-RF
红色片



MA348-GF
绿色片



MA348-BF
蓝色片

产品描述

光源类型: LED SMD 单颗大功率 LED 芯片

色 温: 2700K/3000K/3500K/4000K(可选)

显 色 性: Ra92/ Ra95/ Ra97(可选)

色 容 差: ≤ 2 SDCM

光源光通量: 2494 lm (3000K) ; 2880 lm (4000K)

光源寿命: >50000 小时(TM-21 标准)

紫外相对含量: $<1\mu\text{W}/\text{lm}$

蓝光危害: RG1(低风险)

功 率: 30W

光 束 角: 15°/22°/30°/45°/拉伸(16°×60°)/洗墙(可选)

输入电压: 220-240V ~ 50/60Hz

波动深度: $f=3896\text{Hz}$ ($f>3125\text{Hz}$)

控制方式: 单灯旋钮/蓝牙/0-10V/DALI 等调光(可选)

调光范围: 1%-100%

安装方式: 三回路导轨式

角度调节: 水平 0° ~ 360°, 垂直 0° ~ 90°

主体材质: 铝合金压铸灯体

表面工艺: 静电粉末喷涂; 黑色(MBK)/白色(MWT)(可选)

安规认证: CCC

防护等级: IP20

结构工艺: 灯体无外露明线

光学设计: 同一灯具通过手动更换光学透镜改变配光角度