

Mayalit



Ajaw

导轨射灯

以有限创造无限



声明：本书所列产品外观、颜色、参数仅供参考，以公司发出实物为准；
Mayalit·玛雅照明保留修改或取消该书相关参数资料的权利。

咨询热线：0752-5333003

官方网站：<http://www.mayalit.com/>





改变展陈照明格局

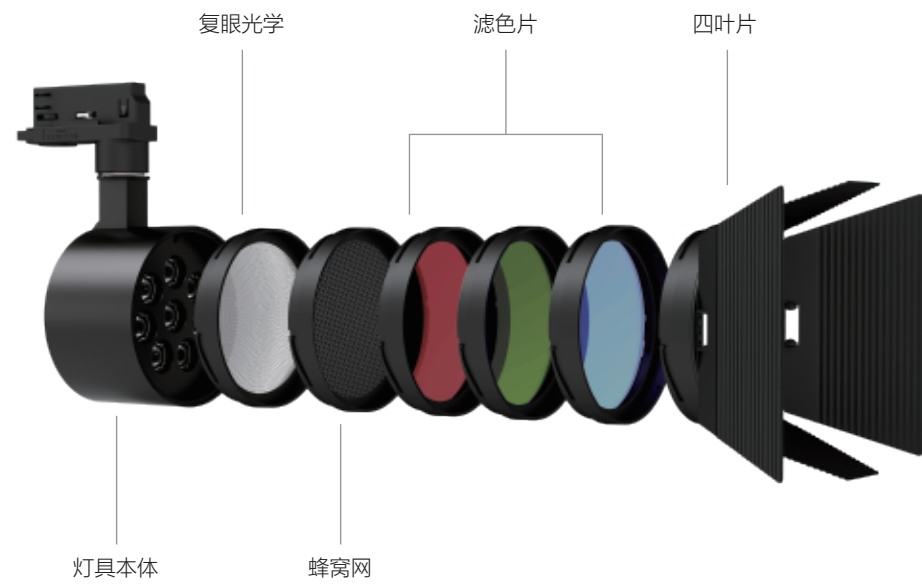
——Ajaw系列导轨射灯

Ajaw系列导轨射灯是一款圆形外观设计家族化产品，
产品涵盖6种功率，应用空间高度可覆盖2-20米，
角度有窄、中、宽、扁光及洗墙等8种不同配光，
光学配件采用可连续拼接方式，可快速便捷叠加，
为布展提供了更快捷、更丰富、更灵活、更可靠的创意选择。



组合灵活

可多次叠加光学组件，实现多样需求，激发无限创意




颜色功率

基础光学

叠加光学


叠加配件

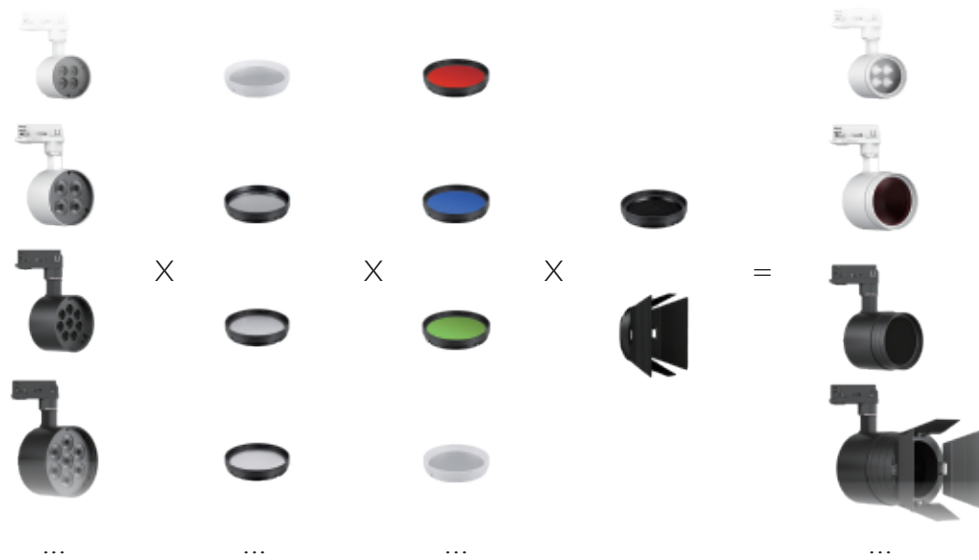灵活组合



复眼光学

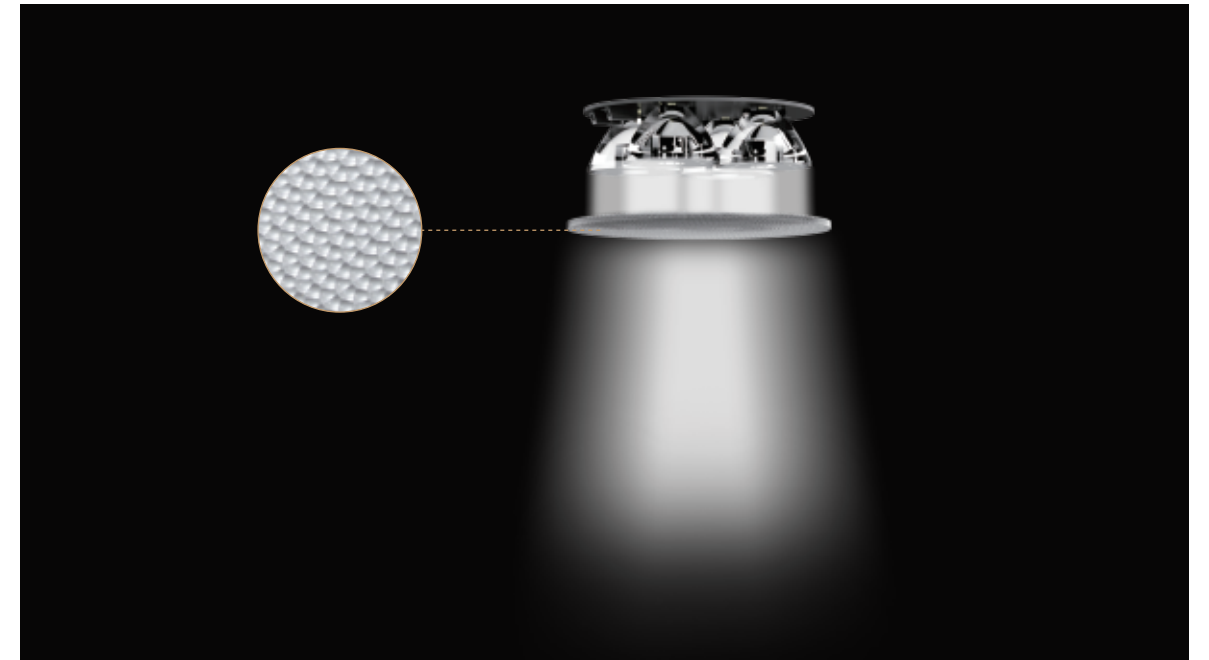首用仿生复眼积分镜片，离散聚光点，削弱杂散光，有效降低眩光值，提高视觉舒适性



换光便捷

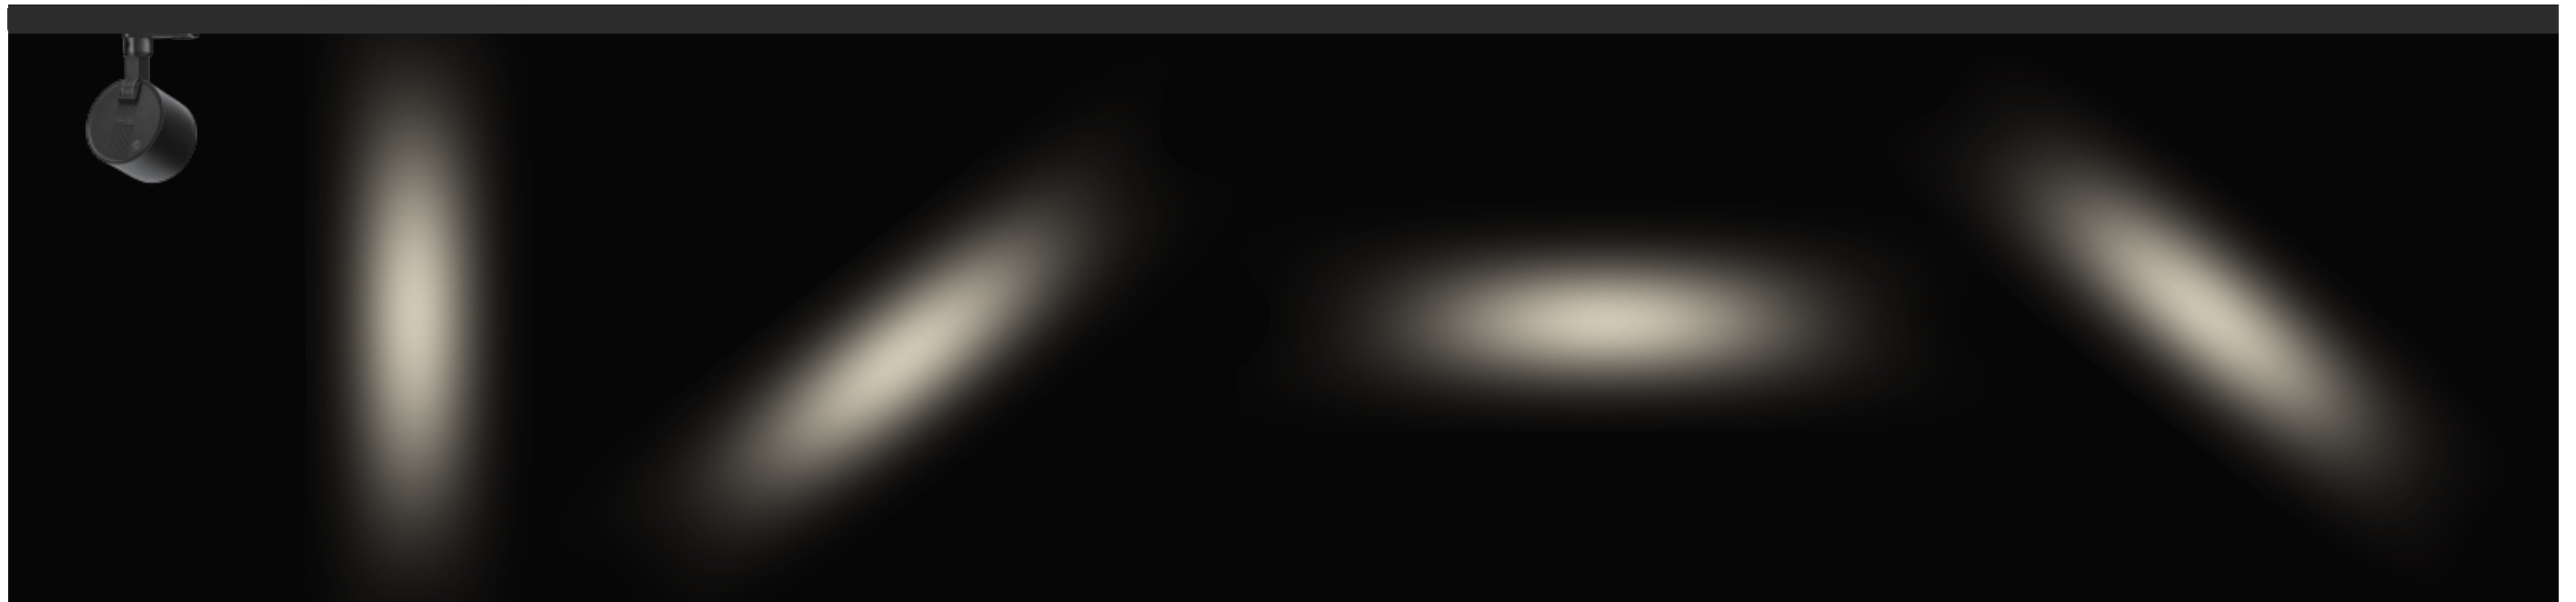
徒手即可完成换光，布展更灵活更高效






扁光调节

转动扁光镜片方向，实现丰富多变的照明效果




配件齐全

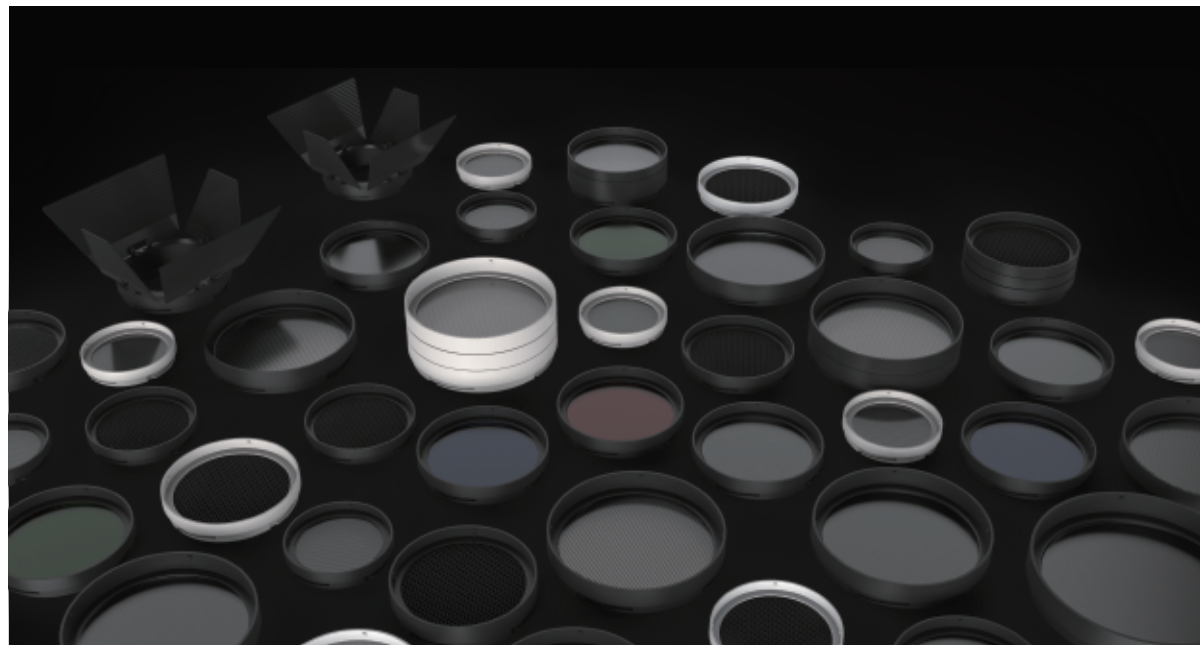蜂窝网、滤色片、四叶片，选择多样，随需变换



角度丰富

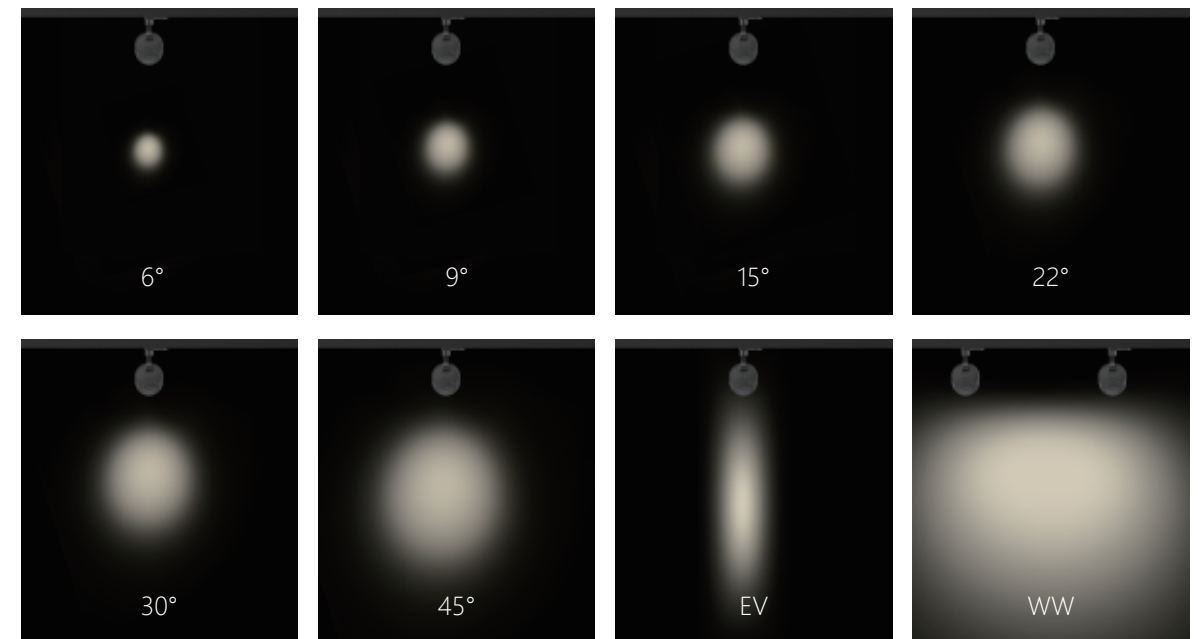窄光、中光、宽光、扁光、洗墙等8种配光照明应用，满足展陈布展的多样化需求





刻度精准

调节处有清晰的刻度标识，在多灯排布时，可以更准确的将灯具投射角度保持高度一致。



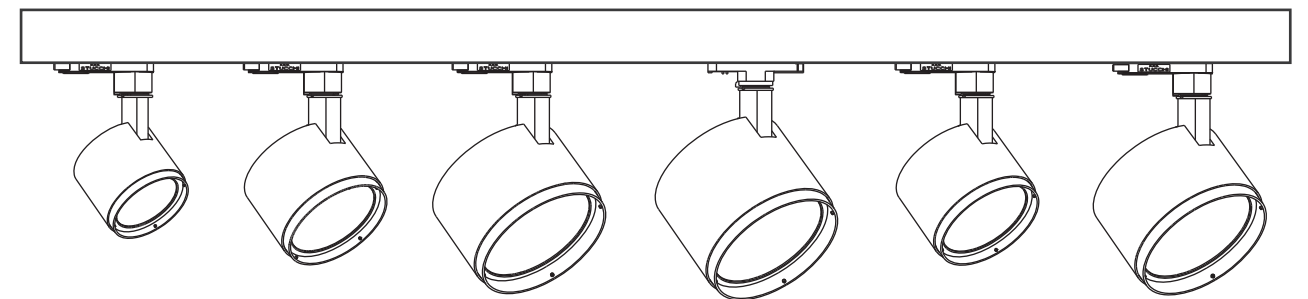
稳定可靠

采用阻尼悬停转轴，频繁调节摆动不松动，可保障摆角位置持久不变



功率多样

6种功率满足不同高度的展陈需求



常规角度

极窄角度

MAL40412-III
12W


MAL40820-III
20W

MAL41230-III
30W

MAL41648-III
48W

MAL40414-III
14W

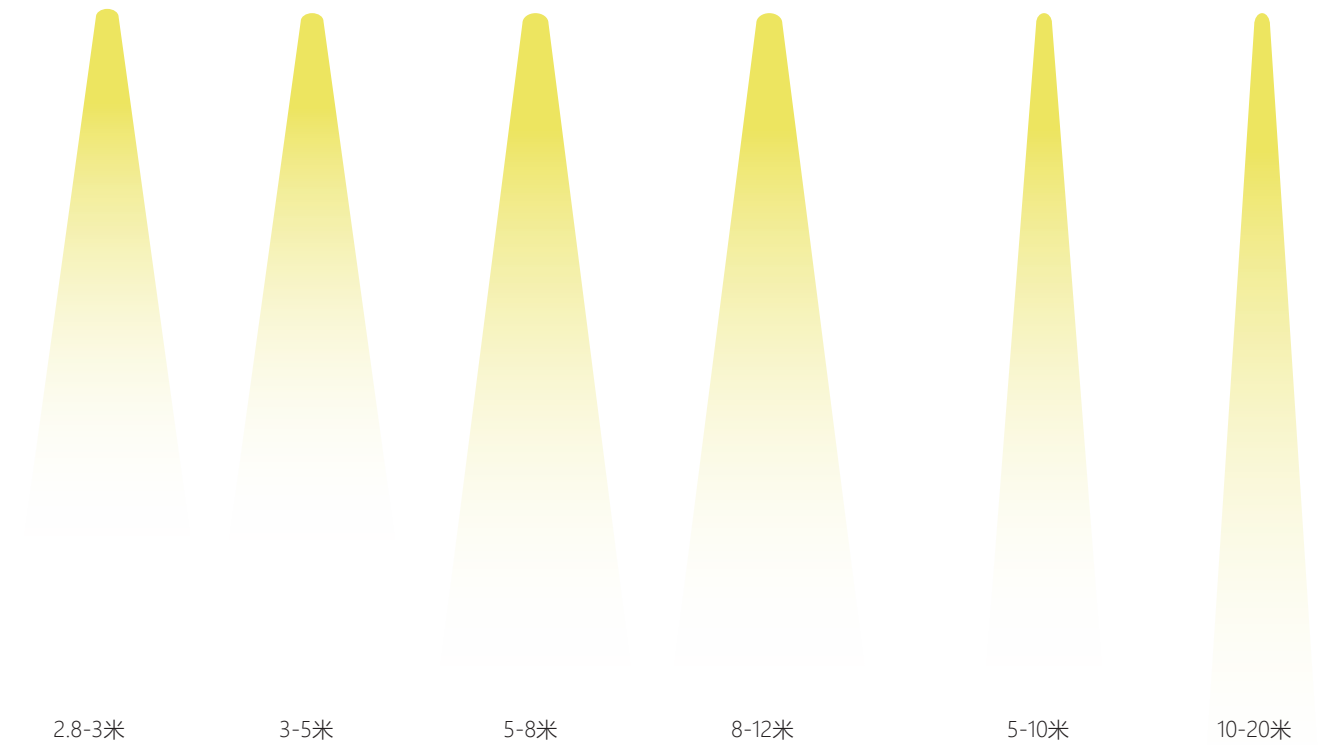MAL40724-III
24W



“海丝” 门户 有福之州

福州“海上丝绸之路”文化遗产专题展

A Blessed City, the Gateway of the Silk Road on the Sea
Thematic Exhibitions of Cultural Heritage of the Silk Road on the Sea of Fuzhou

前言

自古以来，闽越人就“习于水斗，便于舟楫”，素有“闽在海中”之称。秦唐以后，福州凭借靠近台湾海峡的独特区位优势，海上贸易兴盛，成为“海上丝绸之路”的重要港口。五代十国，王审知及其家族主闽，积极经营“海上丝绸之路”，发展对外贸易，奠定了福州港位于闽北海上丝绸之路的贸易格局。

宋元时期，福州港保持与日本、高丽等的对外贸易，明代郑和七次下西洋，船队均在福州长乐太平港驻泊。清代，闽省设省，福州成为福建省的省会，也是福建省对外贸易的重要港口。通过“海上丝绸之路”输往海外，远销各地，福州成为“海上丝绸之路”进入最晚的港口。

该专题展通过文字、文物、图片资料和数据图表等形式，全面展示福州在历史上各个时期对“海上丝绸之路”的发展所起的重要作用。

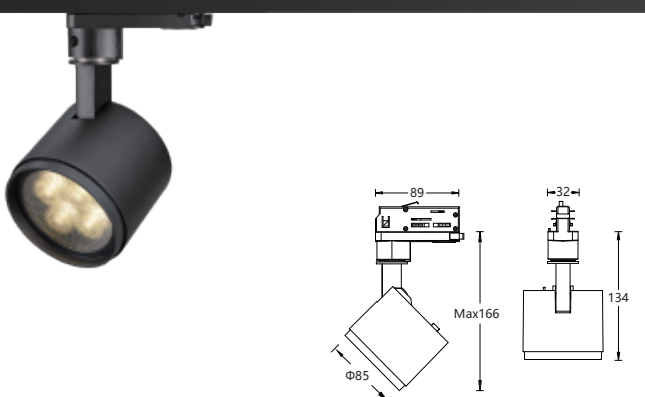













preface















From the ancient times, Min Yue people (the people living in Fujian and Chongqing provinces) are known as "good at sailing on the sea and adept at handling boats". Since Fujian is a coastal area, it has been an important trade and transport hub since the Qin and Han dynasties. In the Five Dynasties and Ten Kingdoms period, Wang Shenzheng, the founder of the Min Kingdom, actively operated the maritime trade, laying the foundation for Fuzhou's position as an important port on the Silk Road on the Sea.

During the Song and Yuan dynasties, Fuzhou maintained its trade with Japan and Korea. In the Ming Dynasty, Zheng He's fleet often stopped at Fuzhou during his seven voyages across the Indian Ocean. In the Qing Dynasty, Fuzhou became the capital of Fujian province and an important port for maritime trade. Through the Silk Road on the Sea, various goods were transported to other parts of the world.

This thematic exhibition uses text, artifacts, images, data, and other forms to comprehensively display the important role that Fuzhou has played in the development of the Silk Road on the Sea throughout its history.















The exhibition is intended to represent the important role that Fuzhou played in the development of the Silk Road on the Sea by displaying historical documents, artifacts, images, data, and other forms.















		型 号		MAL40412-III																					
		功 率		12W																					
		输入电压		220-240V~50/60Hz																					
		安装方式		导轨式安装																					
		调节角度		水平360°/垂直90°																					
		重 量		0.46kg																					
外观颜色		MBK/MWT																							
标 识																									
配件名称		蜂窝网模组		四叶片模组		光学模组		光学模组		光学模组		光学模组		光学模组		红色片		绿色片		蓝色片					
配件图片																									
配件型号		MA312-HC		MA312-BD		MA312-15 15°		MA312-22 22°		MA312-30 30°		MA312-45 45°		MA312-EV 16x60°		MA312-WW Wallwash		MA312-RF		MA312-GF		MA312-BF			
色 温		3000K																							
显色指数		Ra97																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		597lm				588lm				579lm				583lm				570lm				574lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 7052 0.25				1 4182 2.45				1 1939 0.55				1 992 0.86				1 1848 0.26							
		2 1763 0.50				2 1045 0.69				2 485 1.11				2 248 1.72				2 462 0.52							
		3 784 0.75				3 465 1.03				3 215 1.66				3 110 2.58				3 205 0.77							
		4 441 1.00				4 261 1.38				4 121 2.11				4 62 3.48				4 116 1.02							
色 温		4000K																							
显色指数		Ra95																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		615lm				605lm				596lm				600lm				587lm				583lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 7264 0.26				1 4307 0.36				1 1997 0.57				1 1022 0.87				1 1903 0.26							
		2 1816 0.52				2 1076 0.72				2 500 1.14				2 255 1.73				2 476 0.52							
		3 808 0.79				3 479 1.08				3 221 1.71				3 113 2.60				3 211 0.77							
		4 454 1.06				4 269 1.44				4 125 2.28				4 64 3.50				4 119 1.02							
		5 290 1.33				5 172 1.80				5 80 2.85				5 41 4.30				5 76 1.29							

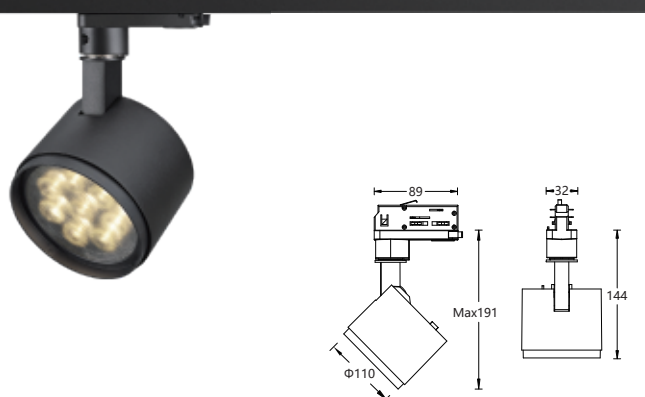




			型 号		MAL40820-III																				
			功 率		20W																				
			输入电压		220-240V~50/60Hz																				
			安装方式		导轨式安装																				
			调节角度		水平360°/垂直90°																				
			重 量		0.8kg																				
外观颜色		MBK/MWT																							
标 识																									
配件名称			蜂窝网模组		四叶片模组		光学模组		光学模组		光学模组		光学模组		光学模组		光学模组		红色片		绿色片		蓝色片		
配件图片																									
配件型号			MA320-HC		MA320-BD		MA320-15 15°		MA320-22 22°		MA320-30 30°		MA320-45 45°		MA320-EV 16x60°		MA320-WW Wallwash		MA320-RF		MA320-GF		MA320-BF		
色 温			3000K																						
显色指数			Ra97																						
角 度			15°			22°			30°			45°			EV(16x60°)			Wallwash							
光 通 量			1195lm			1184lm			1156lm			1161lm			1137lm			1140lm							
配光曲线																									
			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)							
			1 12858 0.26			1 8227 0.35			1 3692 0.56			1 1932 0.86			1 3126 0.27										
			2 3214 0.51			2 2057 0.71			2 922 1.12			2 483 1.70			2 781 0.55										
			3 1429 0.77			3 914 1.06			3 410 1.68			3 214 2.56			3 347 0.82										
			4 804 1.03			4 514 1.41			4 230 2.25			4 121 3.42			4 195 1.09										
5 514 1.28			5 329 1.77			5 148 2.81			5 77 4.28			5 125 1.36													
色 温			4000K																						
显色指数			Ra95																						
角 度			15°			22°			30°			45°			EV(16x60°)			Wallwash							
光 通 量			1251lm			1236lm			1207lm			1221lm			1192lm			1152lm							
配光曲线																									
			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)			H(m) E(lx) D(m)							
			1 14141 0.26			1 8904 0.35			1 3955 0.56			1 2039 0.86			1 3352 0.27										
			2 3535 0.51			2 2226 0.71			2 988 1.12			2 509 1.70			2 837 0.55										
			3 1571 0.77			3 989 1.06			3 439 1.68			3 227 2.56			3 372 0.82										
			4 884 1.03			4 556 1.41			4 247 2.25			4 127 3.42			4 209 1.09										
5 566 1.28			5 356 1.77			5 158 2.81			5 82 4.28			5 134 1.36													






				型 号		MAL40412-III																			
				功 率		12W																			
				输入电压		220-240V~50/60Hz																			
				安装方式		导轨式安装																			
				调节角度		水平360°/垂直90°																			
				重 量		0.46kg																			
外观颜色		MBK/MWT																							
标 识																									
配件名称		蜂窝网模组		四叶片模组		光学模组		光学模组		光学模组		光学模组		光学模组		光学模组		红色片		绿色片		蓝色片			
配件图片																									
配件型号		MA312-HC		MA312-BD		MA312-15 15°		MA312-22 22°		MA312-30 30°		MA312-45 45°		MA312-EV 16x60°		MA312-WW Wallwash		MA312-RF		MA312-GF		MA312-BF			
色 温		3000K																							
显色指数		Ra97																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		597lm				588lm				579lm				583lm				570lm				574lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 7052 0.25				1 4182 2.45				1 1939 0.55				1 992 0.86				1 1848 0.26				1 462 0.52			
		2 1763 0.50				2 1045 0.69				2 485 1.11				2 248 1.72				2 462 0.52				2 205 0.77			
		3 784 0.75				3 465 1.03				3 215 1.66				3 110 2.58				3 205 0.77				3 116 1.02			
		4 441 1.00				4 261 1.38				4 121 2.11				4 62 3.48				4 116 1.02				4 74 1.29			
色 温		4000K																							
显色指数		Ra95																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		615lm				605lm				596lm				600lm				587lm				583lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 7264 0.26				1 4307 0.36				1 1997 0.57				1 1022 0.87				1 1903 0.26				1 476 0.52			
		2 1816 0.52				2 1076 0.72				2 500 1.14				2 255 1.73				2 476 0.52				2 211 0.77			
		3 808 0.79				3 479 1.08				3 221 1.71				3 113 2.60				3 211 0.77				3 119 1.02			
		4 454 1.06				4 269 1.44				4 125 2.28				4 64 3.50				4 119 1.02				4 76 1.29			

				型 号		MAL40820-III																																																																																																			
				功 率		20W																																																																																																			
				输入电压		220-240V~50/60Hz																																																																																																			
				安装方式		导轨式安装																																																																																																			
				调节角度		水平360°/垂直90°																																																																																																			
				重 量		0.8kg																																																																																																			
外观颜色				MBK/MWT																																																																																																					
标 识																																																																																																									
配件名称				蜂窝网模组		四叶片模组		光学模组		光学模组		光学模组		光学模组		光学模组		光学模组		红色片		绿色片		蓝色片																																																																																	
配件图片																																																																																																									
配件型号				MA320-HC		MA320-BD		MA320-15 15°		MA320-22 22°		MA320-30 30°		MA320-45 45°		MA320-EV 16x60°		MA320-VW Wallwash		MA320-RF		MA320-GF		MA320-BF																																																																																	
色 温				3000K																																																																																																					
显色指数				Ra97																																																																																																					
角 度				15°				22°				30°				45°				EV(16x60°)				Wallwash																																																																																	
光 通 量				1195lm				1184lm				1156lm				1161lm				1137lm				1140lm																																																																																	
配光曲线																																																																																																									
				<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>12858</td><td>0.26</td></tr><tr><td>2</td><td>3214</td><td>0.51</td></tr><tr><td>3</td><td>1429</td><td>0.77</td></tr><tr><td>4</td><td>804</td><td>1.03</td></tr><tr><td>5</td><td>514</td><td>1.28</td></tr></table>		H(m)	E(lx)	D(m)	1	12858	0.26	2	3214	0.51	3	1429	0.77	4	804	1.03	5	514	1.28	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>8227</td><td>0.35</td></tr><tr><td>2</td><td>2057</td><td>0.71</td></tr><tr><td>3</td><td>914</td><td>1.06</td></tr><tr><td>4</td><td>514</td><td>1.41</td></tr><tr><td>5</td><td>329</td><td>1.77</td></tr></table>		H(m)	E(lx)	D(m)	1	8227	0.35	2	2057	0.71	3	914	1.06	4	514	1.41	5	329	1.77	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>3692</td><td>0.56</td></tr><tr><td>2</td><td>922</td><td>1.12</td></tr><tr><td>3</td><td>410</td><td>1.68</td></tr><tr><td>4</td><td>230</td><td>2.25</td></tr><tr><td>5</td><td>148</td><td>2.81</td></tr></table>		H(m)	E(lx)	D(m)	1	3692	0.56	2	922	1.12	3	410	1.68	4	230	2.25	5	148	2.81	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>1932</td><td>0.86</td></tr><tr><td>2</td><td>483</td><td>1.70</td></tr><tr><td>3</td><td>214</td><td>2.56</td></tr><tr><td>4</td><td>121</td><td>3.42</td></tr><tr><td>5</td><td>77</td><td>4.28</td></tr></table>		H(m)	E(lx)	D(m)	1	1932	0.86	2	483	1.70	3	214	2.56	4	121	3.42	5	77	4.28	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>3126</td><td>0.27</td></tr><tr><td>2</td><td>781</td><td>0.55</td></tr><tr><td>3</td><td>347</td><td>0.82</td></tr><tr><td>4</td><td>195</td><td>1.09</td></tr><tr><td>5</td><td>125</td><td>1.36</td></tr></table>		H(m)	E(lx)	D(m)	1	3126	0.27	2	781	0.55	3	347	0.82	4	195	1.09	5	125	1.36		
H(m)	E(lx)	D(m)																																																																																																							
1	12858	0.26																																																																																																							
2	3214	0.51																																																																																																							
3	1429	0.77																																																																																																							
4	804	1.03																																																																																																							
5	514	1.28																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	8227	0.35																																																																																																							
2	2057	0.71																																																																																																							
3	914	1.06																																																																																																							
4	514	1.41																																																																																																							
5	329	1.77																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	3692	0.56																																																																																																							
2	922	1.12																																																																																																							
3	410	1.68																																																																																																							
4	230	2.25																																																																																																							
5	148	2.81																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	1932	0.86																																																																																																							
2	483	1.70																																																																																																							
3	214	2.56																																																																																																							
4	121	3.42																																																																																																							
5	77	4.28																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	3126	0.27																																																																																																							
2	781	0.55																																																																																																							
3	347	0.82																																																																																																							
4	195	1.09																																																																																																							
5	125	1.36																																																																																																							
色 温				4000K																																																																																																					
显色指数				Ra95																																																																																																					
角 度				15°				22°				30°				45°				EV(16x60°)				Wallwash																																																																																	
光 通 量				1251lm				1236lm				1207lm				1221lm				1192lm				1152lm																																																																																	
配光曲线																																																																																																									
				<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>14141</td><td>0.26</td></tr><tr><td>2</td><td>3535</td><td>0.51</td></tr><tr><td>3</td><td>1571</td><td>0.77</td></tr><tr><td>4</td><td>884</td><td>1.03</td></tr><tr><td>5</td><td>566</td><td>1.28</td></tr></table>		H(m)	E(lx)	D(m)	1	14141	0.26	2	3535	0.51	3	1571	0.77	4	884	1.03	5	566	1.28	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>8904</td><td>0.35</td></tr><tr><td>2</td><td>2226</td><td>0.71</td></tr><tr><td>3</td><td>989</td><td>1.06</td></tr><tr><td>4</td><td>556</td><td>1.41</td></tr><tr><td>5</td><td>356</td><td>1.77</td></tr></table>		H(m)	E(lx)	D(m)	1	8904	0.35	2	2226	0.71	3	989	1.06	4	556	1.41	5	356	1.77	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>3955</td><td>0.56</td></tr><tr><td>2</td><td>988</td><td>1.12</td></tr><tr><td>3</td><td>439</td><td>1.68</td></tr><tr><td>4</td><td>247</td><td>2.25</td></tr><tr><td>5</td><td>158</td><td>2.81</td></tr></table>		H(m)	E(lx)	D(m)	1	3955	0.56	2	988	1.12	3	439	1.68	4	247	2.25	5	158	2.81	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>2039</td><td>0.86</td></tr><tr><td>2</td><td>509</td><td>1.70</td></tr><tr><td>3</td><td>227</td><td>2.56</td></tr><tr><td>4</td><td>127</td><td>3.42</td></tr><tr><td>5</td><td>82</td><td>4.28</td></tr></table>		H(m)	E(lx)	D(m)	1	2039	0.86	2	509	1.70	3	227	2.56	4	127	3.42	5	82	4.28	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>1</td><td>3352</td><td>0.27</td></tr><tr><td>2</td><td>837</td><td>0.55</td></tr><tr><td>3</td><td>372</td><td>0.82</td></tr><tr><td>4</td><td>209</td><td>1.09</td></tr><tr><td>5</td><td>134</td><td>1.36</td></tr></table>		H(m)	E(lx)	D(m)	1	3352	0.27	2	837	0.55	3	372	0.82	4	209	1.09	5	134	1.36		
H(m)	E(lx)	D(m)																																																																																																							
1	14141	0.26																																																																																																							
2	3535	0.51																																																																																																							
3	1571	0.77																																																																																																							
4	884	1.03																																																																																																							
5	566	1.28																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	8904	0.35																																																																																																							
2	2226	0.71																																																																																																							
3	989	1.06																																																																																																							
4	556	1.41																																																																																																							
5	356	1.77																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	3955	0.56																																																																																																							
2	988	1.12																																																																																																							
3	439	1.68																																																																																																							
4	247	2.25																																																																																																							
5	158	2.81																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	2039	0.86																																																																																																							
2	509	1.70																																																																																																							
3	227	2.56																																																																																																							
4	127	3.42																																																																																																							
5	82	4.28																																																																																																							
H(m)	E(lx)	D(m)																																																																																																							
1	3352	0.27																																																																																																							
2	837	0.55																																																																																																							
3	372	0.82																																																																																																							
4	209	1.09																																																																																																							
5	134	1.36																																																																																																							

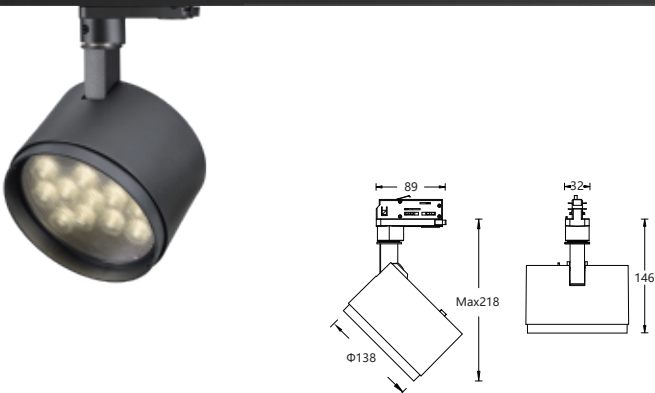		型 号	MAL41230-III								
		功 率	30W								
		输入电压	220-240V~50/60Hz								
		安装方式	导轨式安装								
		调节角度	水平360°/垂直90°								
		重 量	1.45kg								
外观颜色		MBK/MWT									
标 识											
配件名称	蜂窝网模组	四叶片模组	光学模组	光学模组	光学模组	光学模组	光学模组	光学模组	红色片	绿色片	蓝色片
配件图片											
配件型号	MA348-HC	MA348-BD	MA348-15 15°	MA348-22 22°	MA348-30 30°	MA348-45 45°	MA348-EV 16x60°	MA348-WW Wallwash	MA348-RF	MA348-GF	MA348-BF
色 温	3000K										
显色指数	Ra97										
角 度	15°	22°	30°	45°	EV(16x60°)	Wallwash					
光 通 量	1592lm	1566lm	1515lm	1565lm	1504lm	1479lm					
配光曲线											
	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)					
	1 16306 0.26	1 10391 0.36	1 4903 0.56	1 2593 0.86	1 4435 0.30						
	2 4076 0.51	2 2598 0.72	2 1226 1.11	2 648 1.72	2 1109 0.61						
	3 1040 0.77	3 1154 1.10	3 544 1.67	3 288 2.57	3 493 0.91						
	4 1019 1.02	4 649 1.40	4 306 2.23	4 162 3.43	4 277 1.21						
	5 652 1.28	5 416 1.77	5 195 2.80	5 104 4.28	5 177 1.52						
色 温	4000K										
显色指数	Ra95										
角 度	15°	22°	30°	45°	EV(16x60°)	Wallwash					
光 通 量	1718lm	1692lm	1654lm	1655lm	1604lm	1593lm					
配光曲线											
	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)	H(m) E(lx) D(m)					
	1 17110 0.26	1 10903 0.36	1 5145 0.56	1 2721 0.86	1 4654 0.30						
	2 4277 0.51	2 2726 0.72	2 1286 1.11	2 680 1.72	2 1164 0.61						
	3 1091 0.77	3 1211 1.10	3 571 1.67	3 302 2.57	3 517 0.91						
	4 1069 1.02	4 681 1.40	4 321 2.23	4 170 3.43	4 291 1.21						
	5 684 1.28	5 436 1.77	5 205 2.80	5 109 4.28	5 186 1.52						

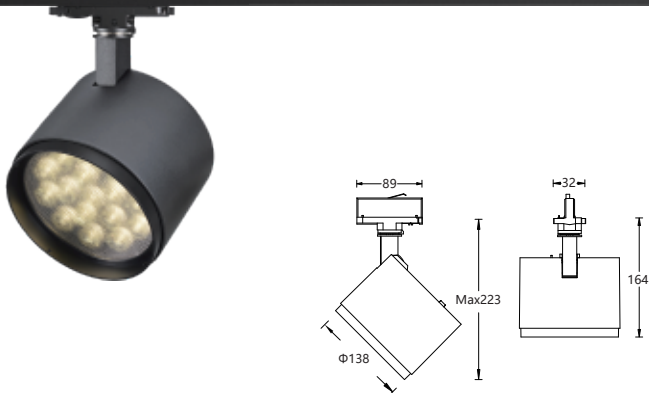		型 号		MAL41648-III																					
		功 率		48W																					
		输入电压		220-240V~50/60Hz																					
		安装方式		导轨式安装																					
		调节角度		水平360°/垂直90°																					
		重 量		1.65kg																					
		外观颜色		MBK/MWT																					
标 识																									
配件名称		蜂窝网模组		四叶片模组		光学模组		光学模组		光学模组		光学模组		光学模组		光学模组		红色片		绿色片		蓝色片			
配件图片																									
配件型号		MA348-HC		MA348-BD		MA348-15 15°		MA348-22 22°		MA348-30 30°		MA348-45 45°		MA348-EV 16x60°		MA348-WW Wallwash		MA348-RF		MA348-GF		MA348-BF			
色 温		3000K																							
显色指数		Ra97																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		2577lm				3532lm				2465lm				2456lm				2388lm				2392lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 27889 0.26				1 17400 0.35				1 8052 0.56				1 4216 0.86				1 7329 0.27							
		2 6972 0.51				2 4348 0.70				2 2013 1.11				2 1024 1.72				2 1832 0.54							
		3 3099 0.77				3 1933 1.05				3 895 1.67				3 455 2.57				3 814 0.81							
		4 1743 1.02				4 1087 1.40				4 503 2.23				4 256 3.43				4 458 1.08							
		5 1116 1.28				5 695 1.77				5 322 2.80				5 164 4.28				5 293 1.35							
色 温		4000K																							
显色指数		Ra95																							
角 度		15°				22°				30°				45°				EV(16x60°)				Wallwash			
光 通 量		2728lm				2682lm				2614lm				2610lm				2521lm				2536lm			
配光曲线																									
		H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)				H(m) E(lx) D(m)			
		1 28422 0.26				1 17836 0.35				1 8424 0.56				1 4342 0.86				1 7691 0.27							
		2 7102 0.52				2 4459 0.70				2 2106 1.11				2 1086 1.72				2 1919 0.54							
		3 3157 0.78				3 1982 1.05				3 936 1.67				3 483 2.57				3 853 0.81							
		4 1776 1.04				4 1115 1.40				4 527 2.23				4 271 3.43				4 480 1.08							
		5 1136 1.30				5 713 1.77				5 338 2.80				5 174 4.28				5 307 1.35							

		型 号	MAL40414-III																																							
		功 率	14W																																							
		输入电压	220-240V~50/60Hz																																							
		安装方式	导轨式安装																																							
		调节角度	水平360°/垂直90°																																							
		重 量	0.8kg																																							
		外观颜色	MBK/MWT																																							
标 识																																										
配件名称	蜂窝网模组 四叶片模组 光学模组 光学模组 红色片 绿色片 蓝色片																																									
配件图片																																										
配件型号	MA320-HC MA320-BD MA314-6 6° MA314-9 9° MA320-RF MA320-GF MA320-BF																																									
色 温	3000K																																									
显色指数	Ra97																																									
角 度	6°			9°																																						
光 通 量	834lm			798lm																																						
配光曲线	 <table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>10805</td><td>0.21</td></tr><tr><td>4</td><td>2711</td><td>0.43</td></tr><tr><td>6</td><td>1201</td><td>0.64</td></tr><tr><td>8</td><td>675</td><td>0.86</td></tr><tr><td>10</td><td>432</td><td>1.07</td></tr></table>			H(m)	E(lx)	D(m)	2	10805	0.21	4	2711	0.43	6	1201	0.64	8	675	0.86	10	432	1.07	 <table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>6026</td><td>0.29</td></tr><tr><td>4</td><td>1506</td><td>0.58</td></tr><tr><td>6</td><td>670</td><td>0.88</td></tr><tr><td>8</td><td>377</td><td>1.2</td></tr><tr><td>10</td><td>241</td><td>1.50</td></tr></table>			H(m)	E(lx)	D(m)	2	6026	0.29	4	1506	0.58	6	670	0.88	8	377	1.2	10	241	1.50
H(m)	E(lx)	D(m)																																								
2	10805	0.21																																								
4	2711	0.43																																								
6	1201	0.64																																								
8	675	0.86																																								
10	432	1.07																																								
H(m)	E(lx)	D(m)																																								
2	6026	0.29																																								
4	1506	0.58																																								
6	670	0.88																																								
8	377	1.2																																								
10	241	1.50																																								
色 温	4000K																																									
显色指数	Ra95																																									
角 度	6°			9°																																						
光 通 量	861lm			819lm																																						
配光曲线	 <table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>11417</td><td>0.21</td></tr><tr><td>4</td><td>2854</td><td>0.43</td></tr><tr><td>6</td><td>1269</td><td>0.64</td></tr><tr><td>8</td><td>714</td><td>0.86</td></tr><tr><td>10</td><td>457</td><td>1.07</td></tr></table>			H(m)	E(lx)	D(m)	2	11417	0.21	4	2854	0.43	6	1269	0.64	8	714	0.86	10	457	1.07	 <table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>6307</td><td>0.29</td></tr><tr><td>4</td><td>1577</td><td>0.58</td></tr><tr><td>6</td><td>700</td><td>0.88</td></tr><tr><td>8</td><td>394</td><td>1.2</td></tr><tr><td>10</td><td>252</td><td>1.50</td></tr></table>			H(m)	E(lx)	D(m)	2	6307	0.29	4	1577	0.58	6	700	0.88	8	394	1.2	10	252	1.50
H(m)	E(lx)	D(m)																																								
2	11417	0.21																																								
4	2854	0.43																																								
6	1269	0.64																																								
8	714	0.86																																								
10	457	1.07																																								
H(m)	E(lx)	D(m)																																								
2	6307	0.29																																								
4	1577	0.58																																								
6	700	0.88																																								
8	394	1.2																																								
10	252	1.50																																								

 		型 号	MAL40724-III																																								
		功 率	24W																																								
		输入电压	220-240V~50/60Hz																																								
		安装方式	导轨式安装																																								
		调节角度	水平360°/垂直90°																																								
		重 量	1.25kg																																								
		外观颜色	MBK/MWT																																								
标 识																																											
配件名称	蜂窝网模组 四叶片模组 光学模组 光学模组 红色片 绿色片 蓝色片																																										
配件图片	      																																										
配件型号	MA348-HC MA348-BD MA324-6 6° MA324-9 9° MA348-RF MA348-GF MA348-BF																																										
色 温	3000K																																										
显色指数	Ra97																																										
角 度	6°				9°																																						
光 通 量	1432lm				1373lm																																						
配光曲线	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>18003</td><td>0.22</td></tr><tr><td>4</td><td>4501</td><td>0.45</td></tr><tr><td>6</td><td>2000</td><td>0.67</td></tr><tr><td>8</td><td>1125</td><td>0.89</td></tr><tr><td>10</td><td>720</td><td>1.11</td></tr></table>				H(m)	E(lx)	D(m)	2	18003	0.22	4	4501	0.45	6	2000	0.67	8	1125	0.89	10	720	1.11	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>11369</td><td>0.28</td></tr><tr><td>4</td><td>2842</td><td>0.56</td></tr><tr><td>6</td><td>1263</td><td>0.83</td></tr><tr><td>8</td><td>710</td><td>1.10</td></tr><tr><td>10</td><td>455</td><td>1.40</td></tr></table>			H(m)	E(lx)	D(m)	2	11369	0.28	4	2842	0.56	6	1263	0.83	8	710	1.10	10	455	1.40
	H(m)	E(lx)	D(m)																																								
2	18003	0.22																																									
4	4501	0.45																																									
6	2000	0.67																																									
8	1125	0.89																																									
10	720	1.11																																									
H(m)	E(lx)	D(m)																																									
2	11369	0.28																																									
4	2842	0.56																																									
6	1263	0.83																																									
8	710	1.10																																									
10	455	1.40																																									
色 温	4000K																																										
显色指数	Ra95																																										
角 度	6°				9°																																						
光 通 量	1477lm				1386lm																																						
配光曲线	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>18560</td><td>0.22</td></tr><tr><td>4</td><td>4640</td><td>0.45</td></tr><tr><td>6</td><td>2062</td><td>0.67</td></tr><tr><td>8</td><td>1160</td><td>0.89</td></tr><tr><td>10</td><td>742</td><td>1.11</td></tr></table>				H(m)	E(lx)	D(m)	2	18560	0.22	4	4640	0.45	6	2062	0.67	8	1160	0.89	10	742	1.11	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>2</td><td>11843</td><td>0.28</td></tr><tr><td>4</td><td>2960</td><td>0.56</td></tr><tr><td>6</td><td>1316</td><td>0.83</td></tr><tr><td>8</td><td>740</td><td>1.10</td></tr><tr><td>10</td><td>474</td><td>1.40</td></tr></table>			H(m)	E(lx)	D(m)	2	11843	0.28	4	2960	0.56	6	1316	0.83	8	740	1.10	10	474	1.40
	H(m)	E(lx)	D(m)																																								
2	18560	0.22																																									
4	4640	0.45																																									
6	2062	0.67																																									
8	1160	0.89																																									
10	742	1.11																																									
H(m)	E(lx)	D(m)																																									
2	11843	0.28																																									
4	2960	0.56																																									
6	1316	0.83																																									
8	740	1.10																																									
10	474	1.40																																									