

产品系列: Akbal / 导轨射灯

项目名称:

灯具型号: MAL41230-II

产品编号:



产品描述

光源类型: LED SMD

色 温: 2700K/3000K/3500K/4000K(可选)

显 色 性: Ra92/ Ra95/ Ra97(可选)

色 容 差: ≤ 2 SDCM

光源寿命: >50000 小时(TM-21 标准)

紫外相对含量: $< 1\mu\text{W}/\text{lm}$

蓝光危害: RG1(低风险)

功 率: 30W

光 束 角: 9°/15°/20°/30°/40°/拉伸(10°×30°)/洗墙(可选)

输入电压: 220-240V ~ 50/60Hz

控制方式: 单灯旋钮/蓝牙/0-10V/DALI 等调光(可选)

安装方式: 三回路导轨式

角度调节: 水平 0° ~ 360°, 垂直 0° ~ 90°

主体材质: 铝合金压铸灯体


表面工艺: 静电粉末喷涂; 黑色(MBK)/白色(MWT)(可选)

安规认证: CCC

防护等级: IP20

结构工艺: 灯体无外露明线

光学设计: 同一灯具通过手动更换光学透镜改变配光角度




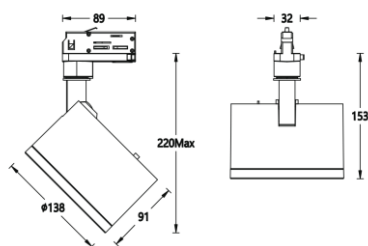


9°

15°

20°




30°



40°

10×30°

Wallwash



产品配件



MA12-9
9°



MA12-15
15°



MA12-20
20°



MA12-30
30°



MA12-40
40°



MA12-EV
10×30°



MA12-WW
Wallwash



MP1-138
蜂窝网



MP4-138
遮光四叶片



MP2-138
防眩筒